

EFR 7163-F

300 - 550 HP Turbo



EFR 7163-F(v)

300 - 550 HP Turbo



EFR 7163-G

300 - 550 HP Turbo



F E A T U R E S

- Gamma-Ti turbine wheel
- Integrated Compressor Recirculation Valve (CRV)
- Dual ceramic ball bearing assembly with metal cage
- Boost Control Solenoid Valve (BCSV)
- Forged Milled Compressor Wheel (FMW)
- Extended tip technology
- Compressor cover with speed sensor mounting provisions

Product - (TYPE)	Complete Turbo	Bearing Housing Material	Super-Core**	TURBINE HOUSING				
				Assembly	A/R	Inlet	Scroll	Waste-gate
7163-F	11639880005	Aluminum*	11637105000	11631008000	0.85	T25	Single	Yes
7163-F(v)	11639880006	Aluminum*	11637105000	11631008001	0.85	V-Band	Single	Yes
7163-G	11639880002	Aluminum*	11637105000	11631008002	0.80	T4	Twin	Yes
7163-I	-	-	-	11631008003	0.85	V-Band	Single	No
7163	-	Aluminum*	11637105000	-	-	-	-	-


Turbo Frame Size	B1
Comp. Wheel Inducer Dia. (mm)	57
Comp. Wheel Outer Dia. (mm)	71
Turbine Wheel Exducer Dia. (mm)	56
Turbine Wheel Outer Dia. (mm)	63

*Aluminum bearing housings require cooling

**The following components are not included as part of the Super-Core: Turbine Housing, Clamp Plate Hardware, Wastegate, and Actuator

COMPRESSOR MAP / APPLICABLE TO ALL 7163 UNITS

Comp. Wheel Inducer Dia. (mm) 57
Comp. Wheel Outer Dia. (mm) 71

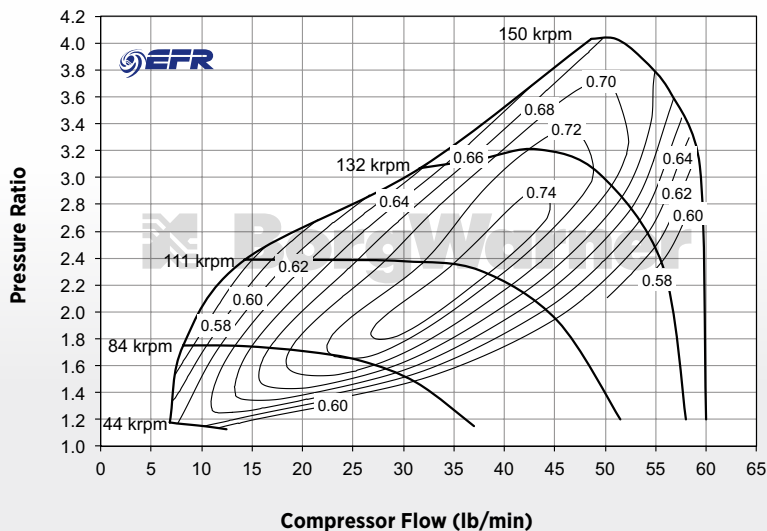

OPTIONAL HARDWARE

See page 37 for: Speed Sensor, Turbine Gaskets & V-Bands, Oil Drain Gasket & Fitting, Actuators & Brackets



Compressor Cover SX-E Style	Compressor Cover with 90° Outlet	I-Type Turbine Housing
11711013004	11711003001	11631008003

SEE PAGE 34 FOR FRAME DIMENSIONS

SEE PAGE 61 FOR SPEED SENSOR INSTALLATION DETAILS